

POLIPI POT

I - Benna idraulica a polipo a cilindri orizzontali per la movimentazione di rottami, rifiuti e materiali vari per gru da camion

GB - Hydraulic polyp-grab with horizontal cylinders for scrap, waste and different material handling for truck-crane


D - Mehrschalengreifer mit liegenden Zylindern für Schrottschlag und verschiedene Materialien für Ladekräne

F - Grappin à ferraille avec vérins horizontaux pour la manipulation des matériaux divers pour grue de camion

E - Pulpo con cilindros horizontales para el manejo de desechos, residuos y materiales diversos para grúa de camión



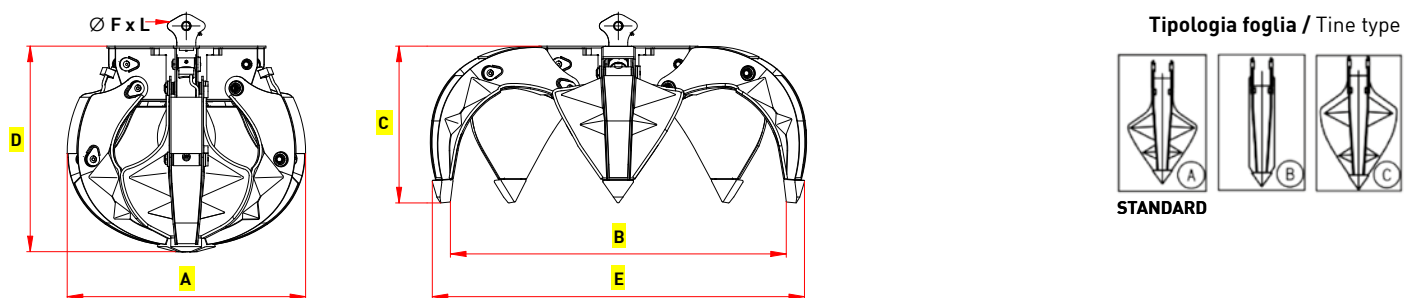

DISEGNO TECNICO / TECHNICAL DRAWING



Portata gru a braccio sfilato / Lifting capacity at the end of boom



Peso escavatore / Excavator weight

Modello Type	Denti Teeth	Capacità Capacity	Portata Load	Peso Weight	Pressione Pressure	Portata olio Oil flow			A	B	C	D	E	FxL
	nr.	Lt	kg	kg	Max bar	Lt/min	Ton.	Ton.	mm	mm	mm	mm	mm	mm
POT 80/4	4	90	750	81	200	20	0,15-0,3	1,0-2,0	650	1010	430	580	1090	25x30
POT 95/4	4	110	900	105	250	25	0,25-0,5	2,0-3,0	730	1130	480	650	1230	25x30
POT 95/5	5	110	1500	118	250	30	0,25-0,5	2,0-3,0	730	1130	480	650	1230	25x30
POT 115/4	4	120	900	112	250	25	0,3-0,6	2,5-4,0	743	1240	497	700	1340	25x30
POT 115/5	5	120	1500	130	250	30	0,3-0,6	2,5-4,0	743	1240	497	700	1340	25x30
POT 130/4	4	160	1500	230	250	50	0,3-0,8	3,0-5,0	900	1300	550	750	1400	30x60
POT 140/5	5	160	2000	265	250	60	0,4-1,0	3,0-5,0	900	1300	550	750	1400	30x60
POT 150/6	6	160	2500	310	250	75	0,4-1,0	3,0-5,0	900	1300	550	750	1400	30x60
POT 170/4	4	205	1500	250	250	50	0,5-1,1	3,0-6,0	920	1560	600	890	1650	30x60
POT 210/5	5	205	2000	275	250	60	0,6-1,2	3,0-6,0	920	1560	600	890	1650	30x60
POT 220/6	6	205	2500	320	250	75	0,6-1,2	3,0-6,0	920	1560	600	890	1650	30x60
POT 250/4*	4	270	2000	310	250	60	0,7-1,3	4,0-7,0	1000	1490	650	900	1640	32x80
POT 255/5*	5	270	2500	350	250	70	0,8-1,6	4,0-7,0	1000	1490	650	900	1640	32x80
POT 265/6*	6	270	3000	390	250	85	0,8-1,6	4,0-7,0	1000	1490	650	900	1640	32x80
POT 290/4*	4	325	2500	375	250	60	1,0-2,0	6,0-9,0	1120	1630	680	930	1760	32x80
POT 295/5*	5	325	3000	415	250	70	1,0-2,0	6,0-9,0	1120	1630	680	930	1760	32x80
POT 325/6*	6	325	3000	460	250	85	1,0-2,0	6,0-9,0	1120	1630	680	930	1760	32x80
POT 390/4*	4	400	2500	420	250	60	1,0-3,0	7,0-12	1240	1780	760	970	1940	32x80
POT 395/5*	5	400	3000	450	250	70	1,0-3,0	7,0-12	1240	1780	760	970	1940	32x80
POT 405/6*	6	400	3000	520	250	85	1,0-3,0	7,0-12	1240	1780	760	970	1940	32x80

* = A richiesta anche nella versione super rinforzato / Available also in the super strengthened version.