
Modular relief valves type SHMP, SKM

ISO 4401 sizes 06 and 10

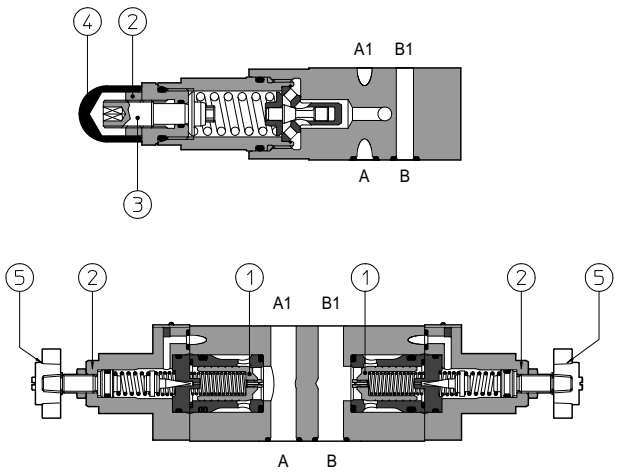

SKM-012/***/V

SHMP are direct operated pressure relief valves, size 06.
SKM are double stage pressure relief valves size 10 with balanced poppet ①.

The pressure adjustment is operated by loosening the locking nut ② and turning the screw ③ protected by cap ④.
Optional versions with setting adjustment by handwheel ⑤ instead of the screw are available on request.
Clockwise rotation increases the pressure.

Valve size and max flow:

SHMP = size 06, max flow: 35 l/min
SKM = size 10, max flow: 120 l/min

Mounting surface: **ISO 4401 size 06, 10**
Max pressure: up to **350 bar**

1 MODEL CODE

SHMP	-	011	/	210	/	V	**	/	*

SHMP: Modular pressure relief valve size:
SHMP = 06
SKM = 10

011: Configuration, see section 2
011 = single on port P, dicharge to port T
012 = double on ports A and B, discharge to port T
013 = single on port A, discharge to port T
014 = single on port B, discharge to port T
015 = double on ports A and B, with the relieved pressure cross-discharged

210: Pressure range

	SHMP:	SKM:
50 =	2÷ 50 bar	4÷ 50 bar
100 =	3÷100 bar	5÷100 bar
210 =	10÷210 bar	5÷210 bar
350 =	15÷350 bar	5÷350 bar


V: Options:
V = setting adjustment by handwheel instead of a grub screw protected by cap


******: Series number

*****: Seals material, see section 3:
- = NBR
PE = FKM
BT = HNBR

2 HYDRAULIC CHARACTERISTICS

Hydraulic configuration

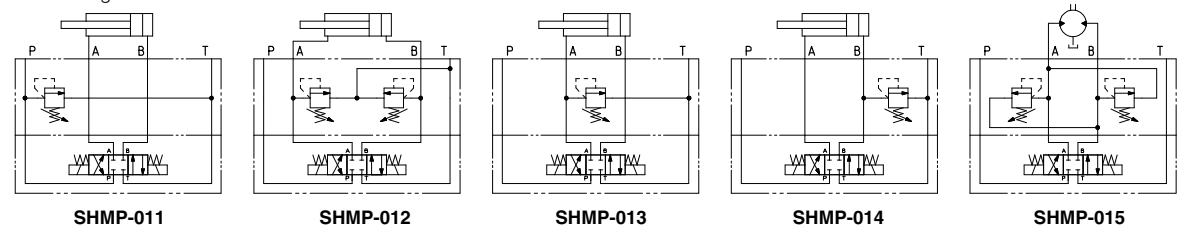

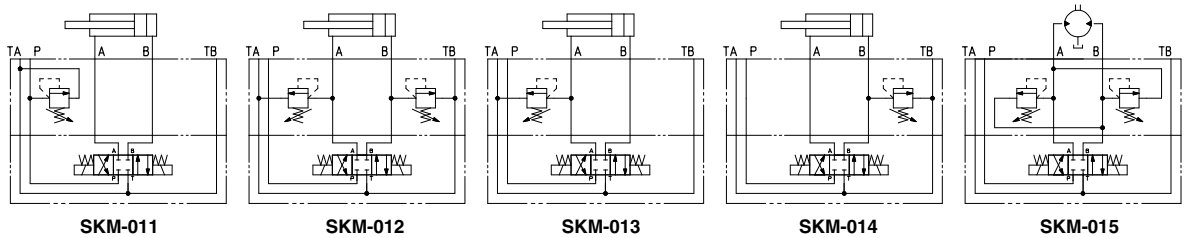


Valve model		SHMP	SKM
Max flow	[l/min]	35	120
Pressure range	[bar]	2÷50; 3÷100; 10÷210; 15÷350	4÷50; 5÷100; 5÷210; 5÷350

3 MAIN CHARACTERISTICS, SEALS and HYDRAULIC FLUIDS - for other fluids not included in below table, consult our technical office


Assembly position / location	Any position		
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)		
MTTFd values according to EN ISO 13849	150 years, for further details see technical table P007		
Ambient temperature	Standard execution = -30°C ÷ +70°C /PE option = -20°C ÷ +70°C /BT option = -40°C ÷ +70°C		
Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +80°C, with HFC hydraulic fluids = -20°C ÷ +50°C FSKM seals (/PE option)= -20°C ÷ +80°C HNBR seals (/BT option)= -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15÷100 mm²/s - max allowed range 2.8 ÷ 500 mm²/s		
Max fluid contamination level	ISO4406 class 20/18/15 NAS1638 class 9, see also filter section at www.atos.com or KTF catalog		
Hydraulic fluid	**Suitable seals type**	**Classification**	**Ref. Standard**
Mineral oils	NBR, FSKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD	DIN 51524
Flame resistant without water	FSKM	HFDU, HFDR	ISO 12922
Flame resistant with water	NBR, HNBR	HFC	

4 REGULATED PRESSURE VERSUS FLOW DIAGRAMS (Based on mineral oil ISO VG 46 at 50°C)

SHMP

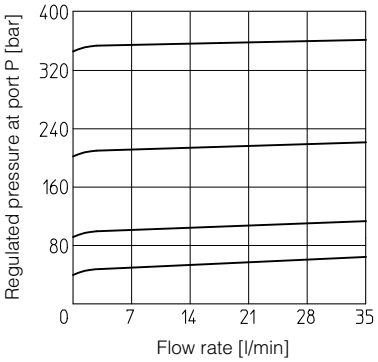


SKM

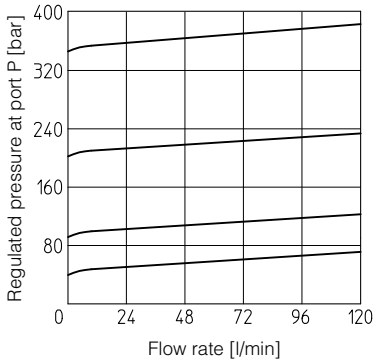


5 MINIMUM PRESSURE VERSUS FLOW DIAGRAMS (Based on fluid viscosity of 25 mm²/s at 40°C)

SHMP

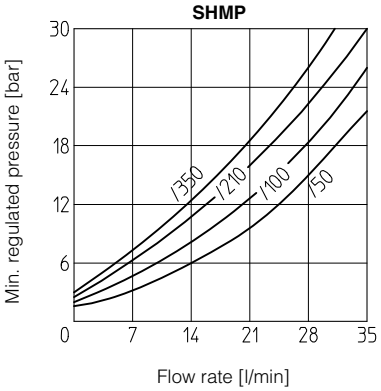


SKM

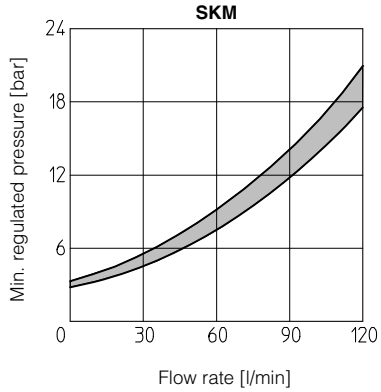


6 INSTALLATION DIMENSIONS OF SHMP VALVES [mm]

SHMP-011

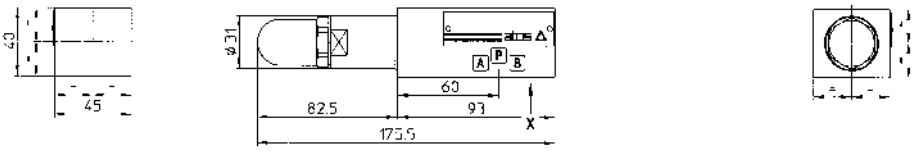


Mass: 1,4 Kg

SHMP-012

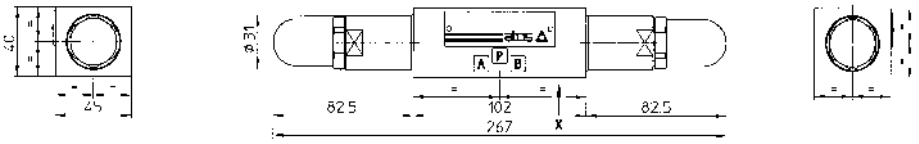

Mass: 1,7 Kg


SHMP-013
SHMP-014

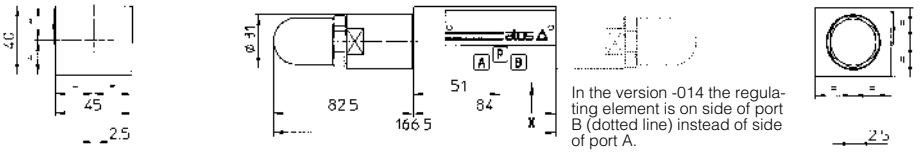

In the version -014 the regulating element is on side of port B (dotted line) instead of side of port A.


Mass: 1,2 Kg

SHMP-015

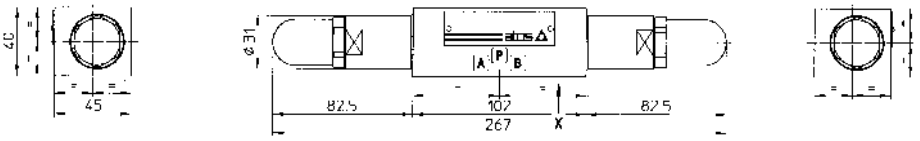


Mass: 1,7 Kg

Adjustment device for option /V




ISO 4401: 2005
Mounting surface: 4401-03-02-0-05
Diameter of ports A, B, P, T: Ø = 7,5 mm
Seals: 4 OR 108



Fastening bolts: n° 4 socket head screws M5. The lenght depends on number and type of modular elements associated.


8 INSTALLATION DIMENSIONS OF SKM VALVES [mm]

SKM-011

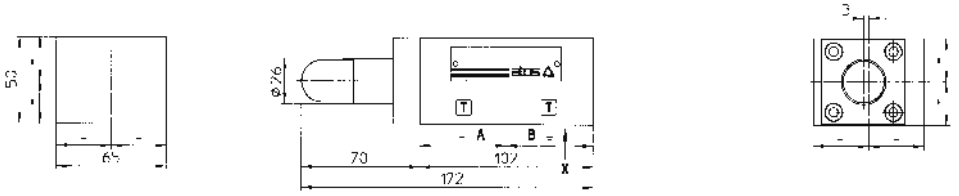


Mass: 2,5 Kg

SKM-012

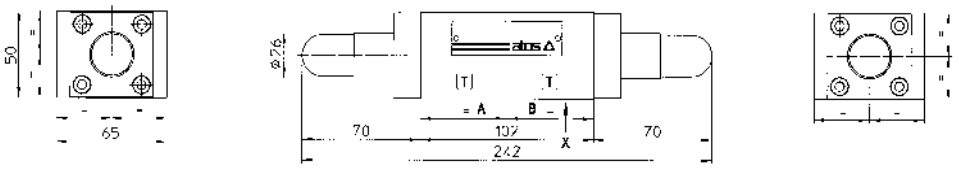


Mass: 2,8 Kg

SKM-013

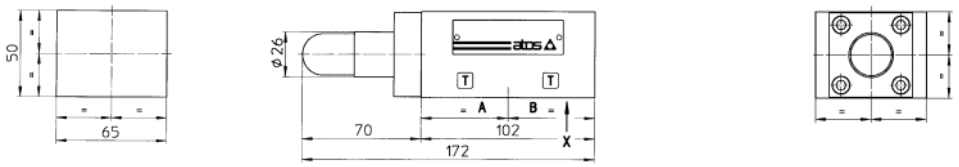


Mass: 2,5 Kg

SKM-014

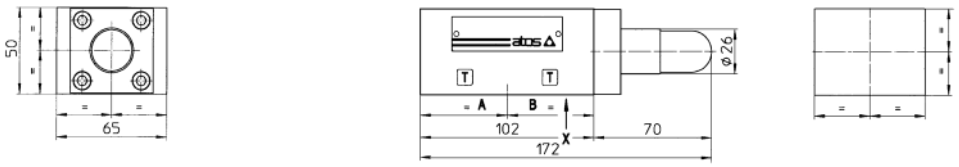


Mass: 2,5 Kg


SKM-015

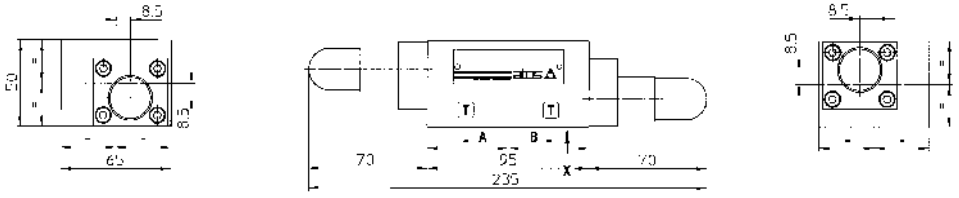

Mass: 2,5 Kg

Adjustement device for option /V



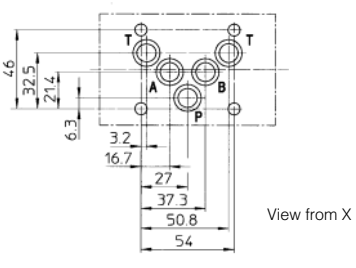

View from X

ISO 4401: 2005
Mounting surface: 4401-05-04-0-05
Diameter of ports A, B, P, T: Ø = 11,2 mm
Seals: 5 OR 2050

Fastening bolts: n° 4 socket head screws M6. The lenght depends on number and type of modular elements associated.