



SEQUENCE VALVES WITH PRIMARY PRESSURE COMPENSATION			
Code Number	Type	Max. Flow L/min	Max. Pressure Bar
V0642	VSQAPP3/8"	35	350
V0662	VSQAPP 1/2"	70	350
V0667	VSQAPP 3/4"	110	400



Note: Standard pressure setting range is 30-180 bar. (Set to 90 bar.) Please contact us for other options.
For 3/4" standard pressure setting range is 50-400 bar. (Set to 180 bar.) Please contact us for other options.

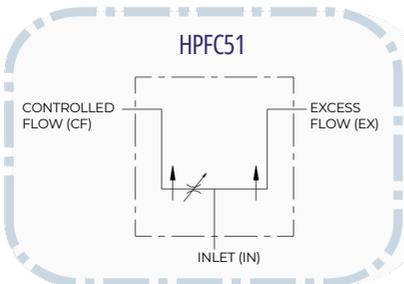

PRESSURE COMPENSATING VARIABLE FLOW CONTROL VALVE		
Code Number	Ports	Max. Flow L/min
HPFCR51	1/2" NPT	60

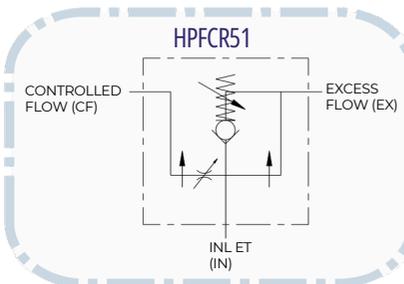

ORDERING CODE

HPFC				
<p>Relief valve Omit = No relief R = Adj. ball spring relief (110 bar)</p>				
<p>Type 51 = Standard flow control</p>				<p>Flow setting 30 = 0-30 L/min 60 = 0-60 L/min 114 = 0-114 L/min</p>
<p>Port size 3/8 = 3/8" NPT (30 L/min) 1/2 = 1/2" NPT (60 L/min) 3/4 = 3/4" NPT (114 L/min) 6 = 9/16-18 UNF (30 L/min) 8 = 3/4-16 UMF (30 L/min) 10 = 7/8-14 UNF (60 L/min) 12 = 11/16-12 UMF (114 L/min)</p>				<p>Ports 2P = With two ports Omit = With 3 ports</p>
<p>Ordering example: HPFC R 51 1/2 60</p>				